
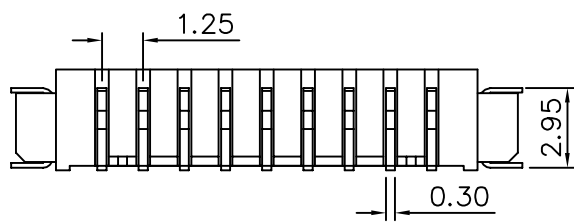

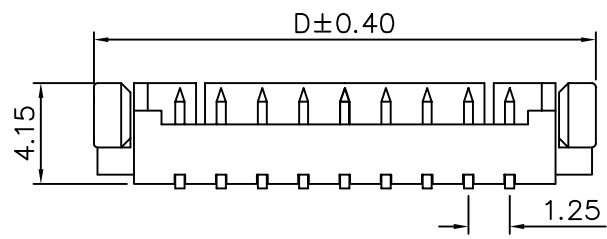


SPECIFICATIONS
 Insulator : Nylon46 UL 94V-0
 Contact: Phosphor Bronze

Recommended P.C.Board Pattern Dim.

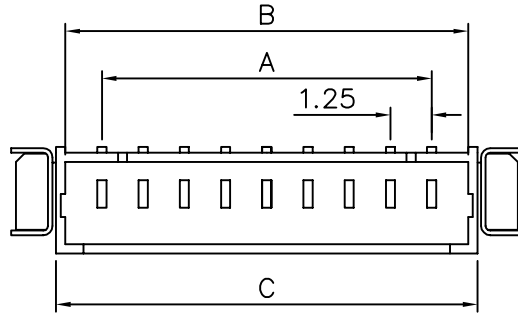

CKT	A	B	C	D
2	1.25	3.05	4.25	7.65
3	2.50	4.30	5.50	8.90
4	3.75	5.55	6.75	10.15
5	5.00	6.80	8.00	11.40
6	6.25	8.05	9.25	12.65
7	7.50	9.30	10.50	13.90
8	8.75	10.65	11.75	15.15
9	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.	AREA	REVISIONS	CHK	DATE		
		MEI							REV.	A
		CHECKED BY								
RAN		DRAWING BY		UNIT						
HZF		A		mm						
SCALE	NONE	REV.	A	UNIT						